


## EXTC series

**Built into a stud,  
for plastics extruder**

- **Protective sheath:**  
stainless steel 316,
- **Probe type: J, K, N, T, E**  
thermocouple conforming to norm DIN IEC 584 Class 2, single or dual,
- **Connection:**  
Rigid or Flexible Standard connector.
- **Operating temperature range:**  
-50 to +1250°C depending of model.
- **Application:**  
capable of withstanding the high temperatures and pressures of PFA extruders.

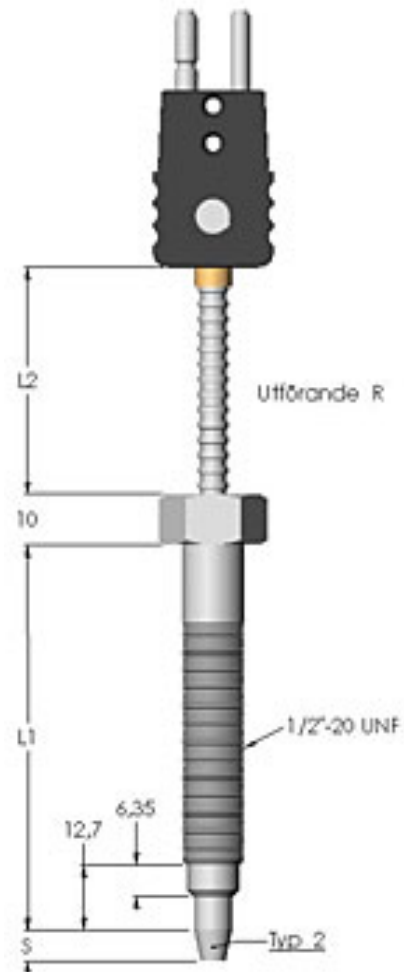

### How to Order ?

Style	Sheath material	Calibration	Barrel	Barrel L1 mm	Flexible L2 mm	Extras
MITC-	-SS304 (800°C)	- J	- 1/4 "	- 75	10	<ul style="list-style-type: none"> <li>- Connector</li> <li>- Shielded cable</li> <li>- Head BZ</li> </ul>
	-SS316L (920°C)	- K	- 1/2 "	- 150	.	
	-SS310 (1100°C)	- T	- 3/4 "		.	
	-SS 446 (1100°C)	- E	- 1 "		10000	

**Order Example:** EXTC - 316L - K - 1/4 - 75 - 30 - Connector